

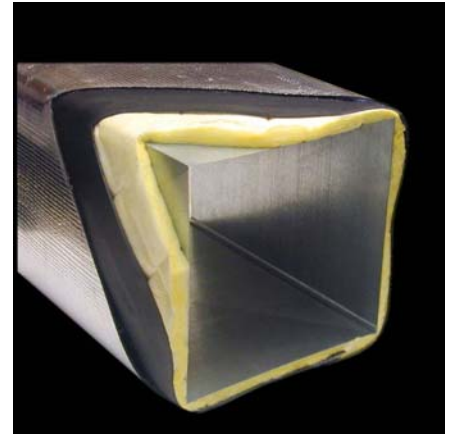
Spec Data Sheet

LAG-SERIES
FLEXIBLE NOISE BARRIERS

Acoustical Pipe and Duct Lagging:
1B Lag/QA-9 Pipe and Duct Lag

IES - 2000's 1B Lag/QA-9 is a composite material featuring a flexible one-pound per square foot reinforced-foil faced loaded vinyl noise barrier bonded to a 2" thick scrim faced quilted sound absorber / decoupler. Used to wrap noisy pipes, ducts, valves and fan housings.

- Standard roll is 48" wide x 30' long
- Accepts matching Lag Tape for easy Installation
- Class A (or 1) flammability rating per ASTM E-84

**Applications:**

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it as well as to increase the sound absorption in the cavity. It also provides sound absorption and thermal insulation around the pipe or ductwork. The 2" thick quilted fiberglass absorber improves low frequency acoustical performance. The reinforced-foil exterior readily accepts a matching lag tape for easy installation.

Product Data:

Description	1 Lb-psf foil-faced loaded vinyl barrier bonded to a 2" thick scrim faced quilted fiberglass absorber
Nominal thickness	2.0"
Standard size	48" wide x 30' long
Weight	1.4 LB psf
"R" Factor	8.0
Flammability	Smoke Density index 19.5 Flame spread index 12.5
Temperature range	-20° to +200° F

Acoustical Data:**Sound Transmission Data**

Product	OCTAVE BAND FREQUENCIES (Hz)						
	125	250	500	1000	2000	4000	STC
1B Lag/QA-9	19	20	23	33	44	53	30

Per ASTM E-90

INPLANT ENVIRO-SYSTEMS 2000, INC.105 W. Lynn Street, PO Box 770, St Paris, Ohio 43072
Phone: (877)248-8640 Fax :(937)663-0678