

## Spec Data Sheet

**LAG-SERIES  
FLEXIBLE NOISE BARRIERS**

---

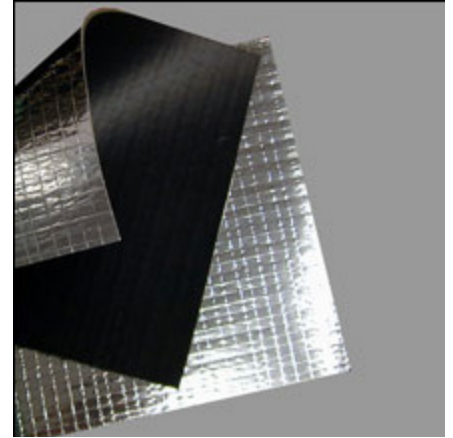
**Acoustical Pipe and Duct Lagging:  
1B Lag**

A flexible one pound per square foot reinforced foil faced loaded vinyl noise barrier used to wrap noisy pipes, ducts, valves and fans housings.

- Standard roll sizes is 48" x 30'L
- Easy to cut, wrap and install with matching lag tape

**Applications:**

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The reinforced foil exterior readily accepts a matching lag tape for easy installation and also serves as a protective jacket for indoor or outdoor applications.

**Product Data**

<b>Description</b>	1 lb. psf reinforced foil faced vinyl barrier
<b>Nominal thickness</b>	.090 inch
<b>Standard width</b>	48" wide
<b>Roll length</b>	30'
<b>Weight</b>	1.0 lb. psf
<b>Temperature Range</b>	-10° to +180° F
<b>Flammability</b>	UL 94: meets VO FMVSS 302: Pass

## Acoustical Performance:

Product	OCTAVE BAND FREQUENCIES (Hz)						
	125	250	500	1000	2000	4000	STC
1B Lag	15	16	21	26	33	38	26

ASTM E-90 &amp; E 413

**INPLANT ENVIRO-SYSTEMS 2000, INC.**

105 W. Lynn Street, PO Box 770, St Paris, Ohio 43072  
Phone: (877)248-8640 Fax :( 937)663-0678