
ACOUSTICAL WALL PANELS

Spec Data Sheet

Architectural Products
S-3100 Tack able Wall Panels



High Tack ability


Class A fire rated

Standard, designer or C.O.M.
fabric

Acoustical Wall Panels by IES – 2000, Inc. are the solution for areas that require noise reduction and are available in a variety of models for various applications. The S-3100 Wall Panel is manufactured specifically as a tack panel and offers minimal sound absorption. Application for the S-3100 panels includes conference rooms, classrooms, offices and any area where low absorption and high tack ability is required.

The S-3100 panel is constructed with a 24# PCF mineral fiber core. Edges are fully wrapped in standard, custom or C.O.M. fabric with the option of square or bevel edge detail. Panels are available in 1/2" or 3/4" thick with standard or custom sizes up to a maximum of 4' x 8'.

S-3100 panels are easily installed with nails and construction adhesive, mechanical clips or hoop and loop.

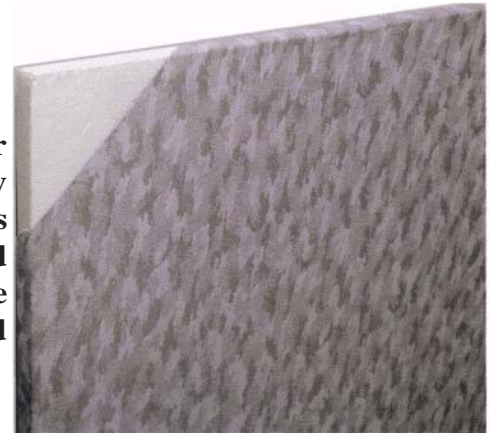

INPLANT ENVIRO-SYSTEMS 2000, INC.

105 W. Lynn Street, PO Box 770, St Paris, Ohio 43072
Phone: (877)248-8640 Fax :(937)663-0678