


Spec Data Sheet

Acoustical Silencers Non - Erosive Series

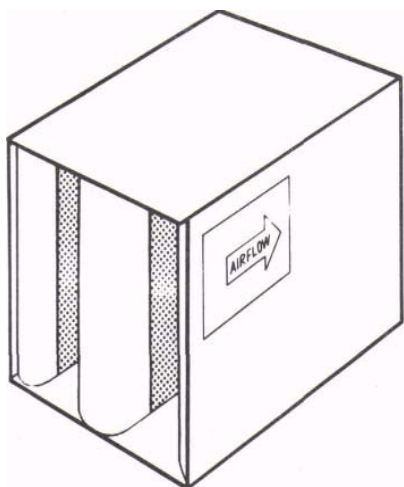

MODEL HP - MD RECTANGULAR NOMENCLATURE EXAMPLE

WIDTH	HEIGHT	LENGTH	MODEL
24	24	36	HP - MD

IES – 2000's Model HP-MD sound attenuators are designed and engineered to eliminate acoustical fill entrainment by the air stream and reduce to a minimum the absorption of gases and particles by the acoustical fill. Reliability and performance are guaranteed since the basic configuration and materials are utilized. This non-erosive, non-pregnable silencer is excellent for hospital and clean room systems. Standard construction is galvanized steel. Mylar sheeting, acoustical fill and special dampening layer. Also available in stainless steel.

MODEL NO.	OCTAVE BANDS	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
	CENTER FREQUENCY (Hz)	63	125	250	500	1000	2000	4000	8000
	FACE VELOCITY FPM	DYNAMIC INSERTION LOSS IN DECIBELS							
3HP-MD	-2000	4	7	9	13	21	19	13	11
	-1000	5	6	10	15	22	20	13	10
	0	7	6	9	15	21	20	16	13
	+1000	6	5	9	14	20	20	16	14
	+2000	5	5	7	11	18	19	16	13
5HP-MD	-2000	7	11	14	23	36	36	23	15
	-1000	6	10	16	25	36	37	22	14
	0	9	9	15	24	35	38	26	19
	+1000	8	9	14	23	33	38	27	21
	+2000	8	8	12	19	30	37	28	23
7HP-MD	-2000	9	19	21	28	42	40	29	20
	-1000	9	17	20	30	43	42	30	22
	0	8	19	20	29	42	46	33	26
	+1000	8	15	17	28	39	45	36	31
	+2000	6	15	14	23	35	43	37	33

THIS TABLE CONTAINS BOTH FORWARD (+) AND REVERSE (-) FLOW ACOUSTIC AND AERODYNAMIC RATINGS BASED ON TEST RESULTS MEASURED IN ACCORDANCE WITH ASTM E477. COPIES OF THESE TEST REPORTS CAN BE FURNISHED UPON REQUEST

INPLANT ENVIRO-SYSTEMS 2000, INC.

105 W. Lynn Street, PO Box 770, St Paris, Ohio 43072
Phone: (877)248-8640 Fax : (937)663-0678