

Acoustical Windows

Spec Data Sheet


Applications:

- Radio/TV Studios
- Control Rooms
- Schools
- Recording Studios
- Engine Test Cells
- Mechanical Rooms
- Machinery Enclosures
- Factory Offices
- Guard Houses




Features:


- Ideal for new construction or retrofit applications
- Easy to install
- All window units are factory glazed
- 12 gauge steel frame with 16 gauge stops
- Fixed frame "HM" or "U" frame designs
- "Split frame" HM design available
- Glazing does not need to be removed to install window units
- Prime-painted standard finish
- Guaranteed acoustical performance

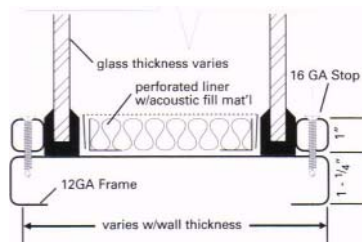

"HM" Frame Design

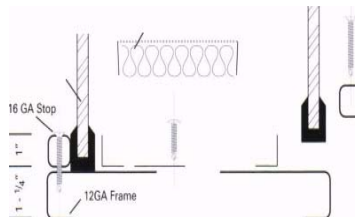

"Split-Frame" Design



U— varies w/wall thickness —w

"U" Frame Design

Model "HM" Windows

- Hollow metal design
- Fixed frame or split frame
- STC rating from 48 to 57 (higher for triple-glazed)
- Glazing from 1/4" to 1-3/8" thick
- Straight or sloped glass design
- Custom sizes available

Model "U" Windows

- "U" frame design can fit any wall thickness
- STC ratings from 43 to 51
- Aluminum or rubber glazing channels
- Suitable for use with modular panel systems or standard construction
- Custom sizes available

INPLANT ENVIRO-SYSTEMS 2000, INC.

105 W. Lynn Street, PO Box 770, St Paris, Ohio 43072
Phone: (877)248-8640 Fax :(937)663-0678